

Galaxy





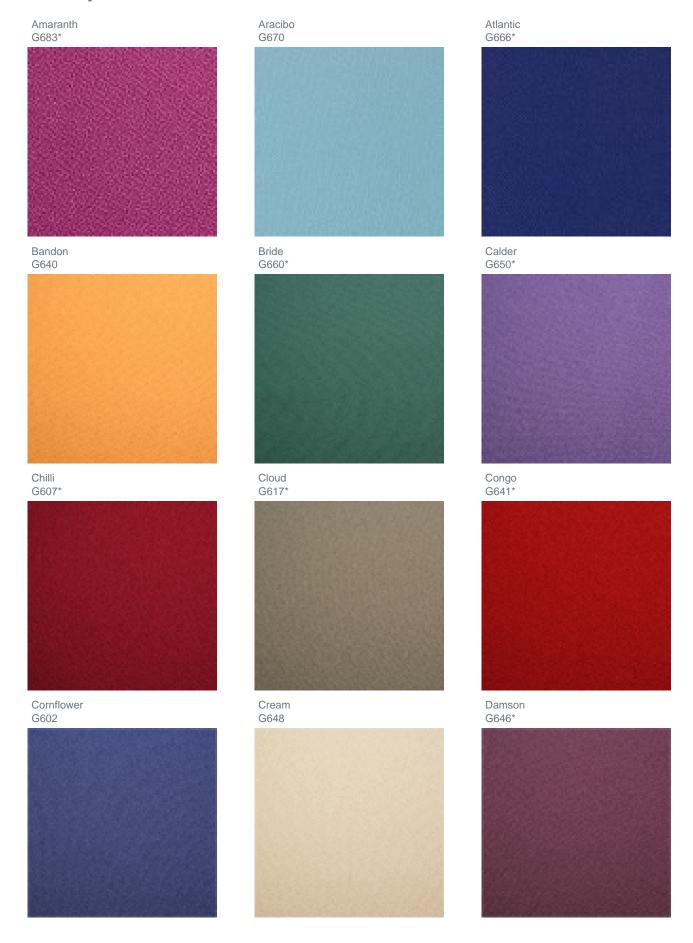

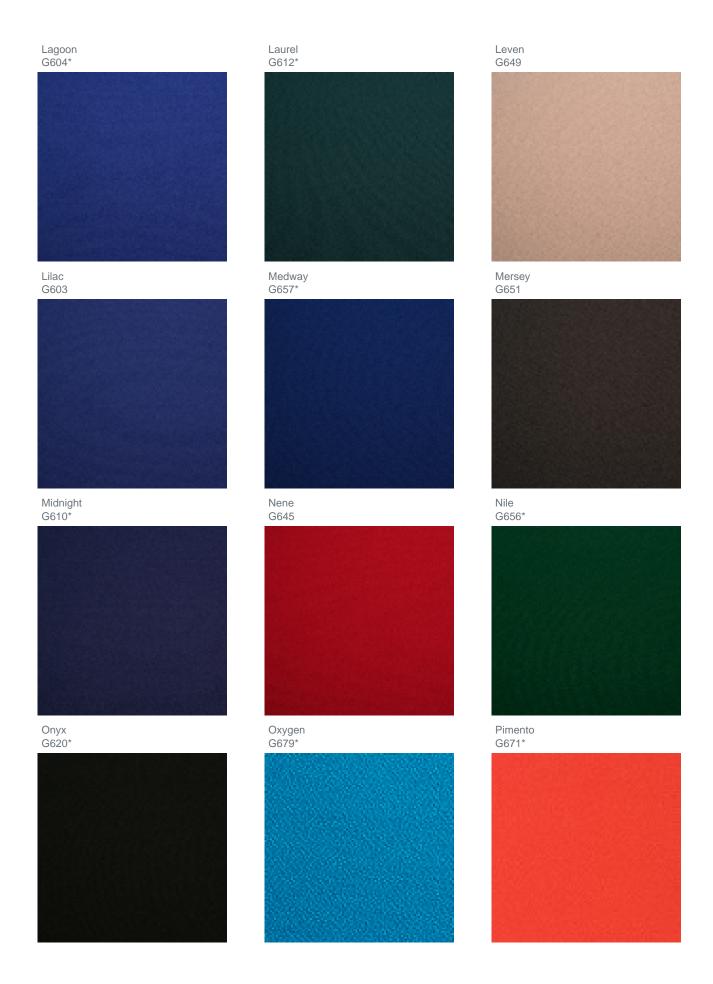

Application:
Office Screens and Vertical Surfaces
Composition:
100% Polyester
Width:
168cm / 66" Tolerance ±2%
Weight:
270gms/m2 Tolerance ±5%
Abrasion:
Tested in accordance with BS 5690: 1999 as modified by Annex F of BS 2543: 2004 to 50,000 rubs Martindale.
Flame Retardancy:
Vertical Surface test. BS 476 Part 7 Class 1. BS EN 1021 - 1&2: 1994 BS 5852 (passes cigarette and match)
Note: Flamability performance is dependent on components used.
Light Fastness:
6+ (ISO 105 – B02:1999)
Colour Matching:
Batch by batch variations in shade may occur within commercial tolerances. We recommend that fabric be examined before use as no claims will be considered after cutting.
Availabiliity:
Generally ex-stock.

Product development:
We reserve the right to change the specifications of our products in line with our product development programme without notice.
Fabric care and maintenance:
Please refer to our fabric care guide.
Guarantee:
Fabric guaranteed for 5 years under normal wear and tear. See our Terms and Conditions
* Co-ordinating colours are available for seating within our Omega Plus range.